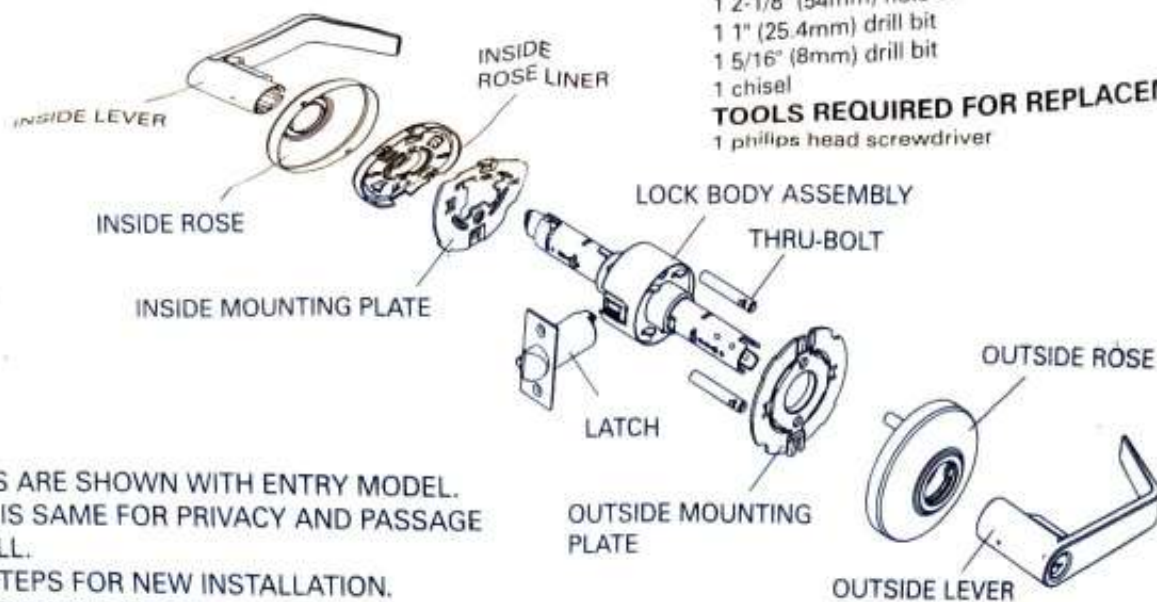


INSTALLATION INSTRUCTIONS COMMERCIAL KEY-IN-LEVER

FOR USE ON DOORS 1-3/8" - 2" (35mm-51mm) THICK
TOOLS REQUIRED FOR NEW INSTALLATION:
 1 philips head screwdriver
 1 2-1/8" (54mm) hole saw
 1 1" (25.4mm) drill bit
 1 5/16" (8mm) drill bit
 1 chisel
TOOLS REQUIRED FOR REPLACEMENT:
 1 philips head screwdriver



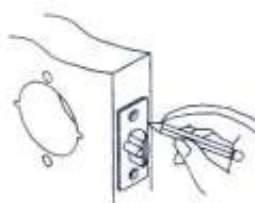


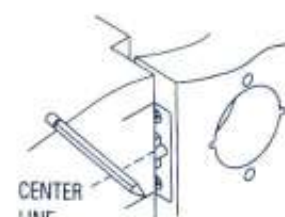


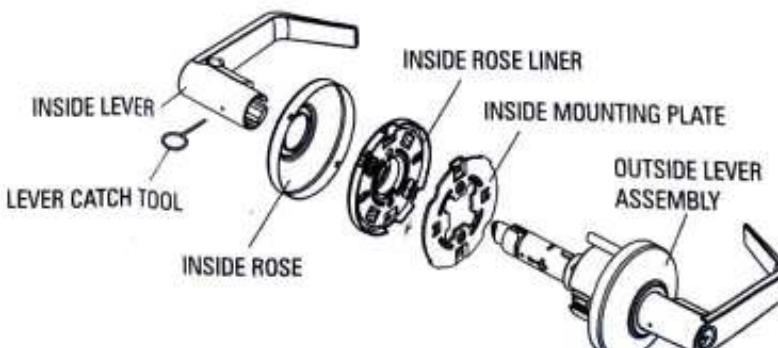


ILLUSTRATIONS ARE SHOWN WITH ENTRY MODEL. INSTALLATION IS SAME FOR PRIVACY AND PASSAGE MODEL AS WELL.

FOLLOW ALL STEPS FOR NEW INSTALLATION.


FOLLOW STEPS 3C, 4C, 5, 6, 7, 8, 9

FOR REPLACEMENT INSTALLATION AFTER REMOVAL OF OLD LOCK AND LATCH.

1. MARK DOOR  <p>a. Start 38" from floor and mark center of door edge. b. Select backset 2-3/8" or 2-3/4" and mark hole center on door face. c. Mark two holes for screw post.</p> <p>NOTE: BACKSET ON DOOR FACE MUST BE SAME AS BACKSET OF YOUR LOCK.</p>	2. DRILL HOLES  <p>5/16" (8mm) HOLE FOR SCREW POST</p> <p>2-1/8" (54mm) HOLE FOR LOCKSET</p> <p>1" OR 31/32" (24.6mm OR 25.4mm) HOLE FOR LATCH</p> <p>Drill holes as marked. NOTE: DRILL 2-1/8" (54mm) HOLE FROM BOTH SIDES TO AVOID SPLITTING WOOD.</p>
3. INSTALL LATCH  <p>a. Insert latch in hole and keep it parallel to door face. Mark outline and remove latch.</p>  <p>b. Chisel 1/8" (3mm) deep or until faceplate flush with door edge.</p>  <p>c. Insert latch and tighten screws. NOTE: LATCHBOLT BEVEL MUST FACE TO CLOSING DIRECTION.</p>	
4. INSTALL STRIKE  <p>a. Close door to mark horizontal center line of strike.</p>  <p>1" (25.4mm) HOLE 1/2" (12.7mm) DEEP</p> <p>b. Measure one half of door thickness from door stop to mark vertical center line of strike. Drill 1" (25.4mm) hole, 1/2" (12.7mm) deep at intersection of horizontal and vertical center lines.</p>  <p>c. Cut out jamb 3/32" (2.4mm) deep or until strike flush with jamb. Tighten screws securely.</p>	
5. REMOVE INSIDE TRIM <p>Use lever catch tool to depress lever catch visible under hole of inside lever shank and slide off inside lever, rose, rose liner and mounting plate.</p>  <p>INSIDE LEVER LEVER CATCH TOOL INSIDE ROSE INSIDE ROSE LINER INSIDE MOUNTING PLATE OUTSIDE LEVER ASSEMBLY</p>	


6. INSTALL REMOVABLE THRU-BOLT (SCREW POST)

- Disassemble outside mounting plate from outside rose plate.
- Make clearance between outside mounting plate and insert the removable thru-bolt (screw post) into the cavities of outside mounting plate.
- Continuing the follow up instructions.

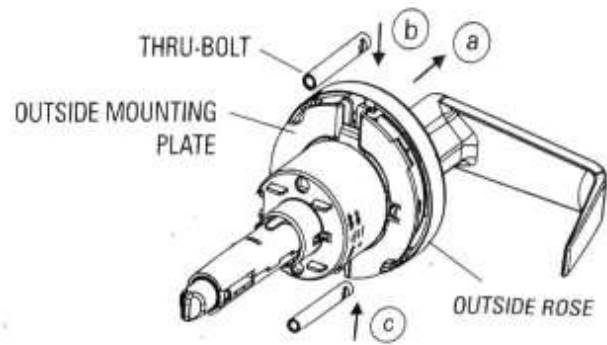

7. ADJUST DOOR THICKNESS

- Remove outside mounting plate toward cylindrical case.
- Put the catch tool into the allocated position of outside mounting plate as the illustrating bellow.
- Rotate outside mounting plate to required door thickness by using a catch tool.
- Reassemble exterior assembly.

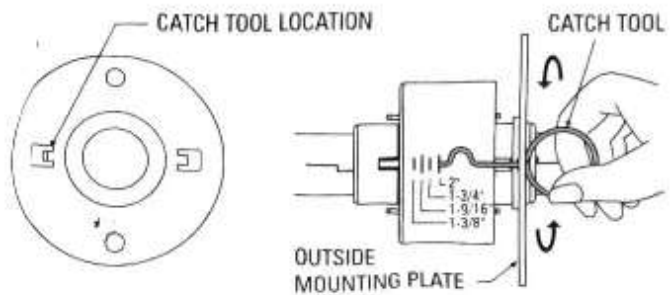


8. REASSEMBLE EXTERIOR ASSEMBLY AND INSTALL


Install the inside rose liner, tab aligning to the lever notch.



The tab of the rosette assembly is positioned on the opposite side of the lever catch, and align to the notch of the lever hole.




Repeat No. 6 to install the removable Thru-Bolt. Install outside lever assembly on the door. Make sure tail of latch engaging with retractor correctly as illustration left.

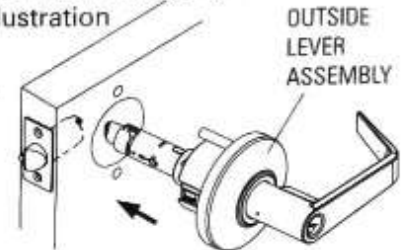


9. INSTALL INSIDE MOUNTING PLATE AND ROSE LINER

- Place mounting plate on door face and turn up the lever slightly and tighten screws securely.

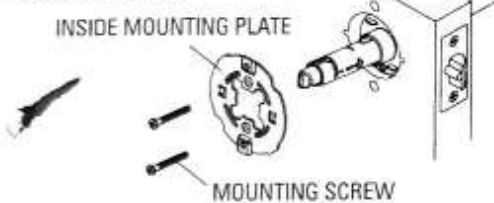

- Place rose liner on mounting plate and tighten with screw securely.

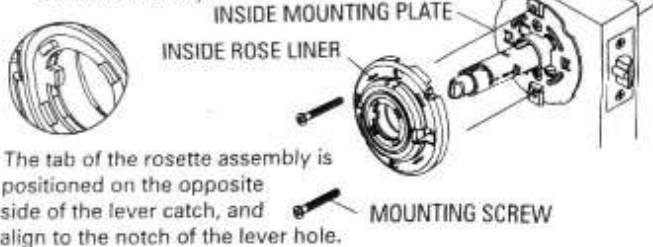

10. INSTALL INSIDE ROSE AND LEVER

- Press rose onto rose liner. Be sure to fit rose in recess of rose liner.



- Use lever catch to press down catch in the hole and push inside lever all the way in until clicks into catch hole.




TEMPLATE

FOLD HERE ON DOOR EDGE

51 45 40 35
2" 1-3/4" 1-9/16" 1-3/8"

Std latch, drill 25.4mm (1") Drive in latch, drill 24.5mm (31/32") hole at center of door edge

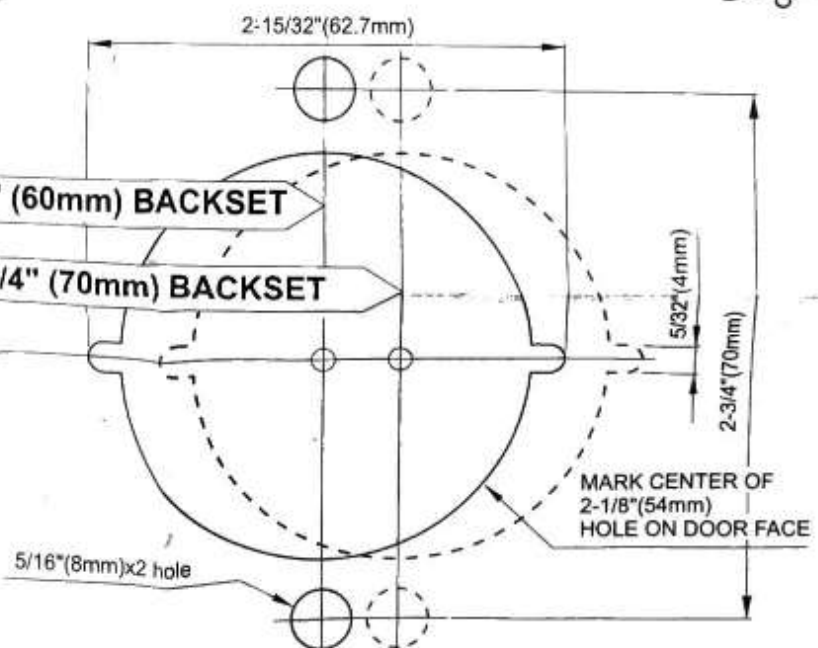

LOCKEY
USA

LEVER - Passage
Grade 2
Finish = SC

